


HITACHI ZX210

20T-24T STEEL TRACKED EXCAVATOR

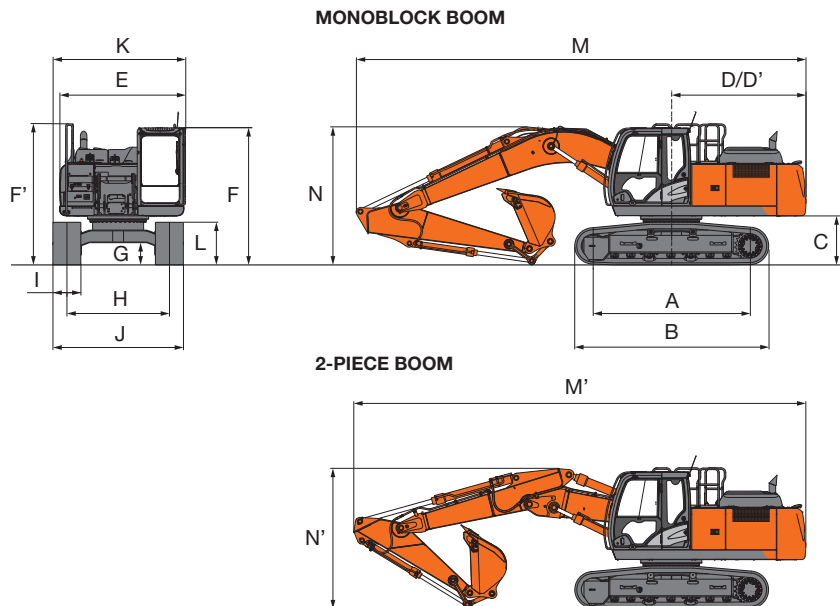

Unit: mm

	ZAXIS 210	ZAXIS 210LC	ZAXIS 210LCN
A Distance between tumbler	3370	3660	3660
B Undercarriage length	4170	4460	4460
* C Counterweight clearance	990	990	990
D Rear-end swing radius	2890	2890	2890
D' Rear-end length	2890	2890	2890
E Overall width of upperstructure	2710	2710	2480
F Overall height of cab	2950	2950	2950
F' Overall height of upperstructure	3020	3020	3020
* G Min. ground clearance	450	450	450
H Track gauge	2200	2390	1980
I Track shoe width	G 600	G 600	G 500
J Undercarriage width	2800	2990	2480
K Overall width	2860	2990	2500
* L Track height with triple grouser shoes	920	920	920
MONOBLOCK BOOM			
M Overall length			
With arm 2.03 m	9750	9750	9750
With arm 2.42 m	9750	9750	9750
With arm 2.91 m	9660	9660	9660
N Overall height of boom			
With arm 2.03 m	3150	3150	3150
With arm 2.42 m	3180	3180	3180
With arm 2.91 m	2940	2940	2940
2-PIECE BOOM			
M' Overall length			
With arm 2.03 m	9720	9720	9720
With arm 2.42 m	9690	9690	9690
With arm 2.91 m	9640	9640	9640
N' Overall height of boom			
With arm 2.03 m	3010	3010	3010
With arm 2.42 m	3060	3060	3060
With arm 2.91 m	2910	2910	2910

YOUR ONE SUPPLIER FOR EQUIPMENT HIRE, NATIONWIDE.

Service area: Nationwide | Branches: New Plymouth & Hawera | Phone: 0800 44 10 44 | Email: hire@presco.co.nz